

Kontrol 65

The Kontrol 65 Series are advanced controllers designed for Single-Parameter, characterised by isolated measurement and usable for most water-treatment applications.
The units feature and independent proportional control output, probe quality checking and a variety of outputs.
The user has full programming authority.

TECHNICAL CHARACTERISTICS

Graphic Display and Keypad
The instruments of the Kontrol 65 family are equipped with a large 128 x 128-pixel backlit monochrome graphic display, which makes viewing the measurement immediate and effective. Also graphic icons to show the Relays status, analog and digital output status, washing cycle, alarms.
Simultaneous flashing values for the numeric measurements, bar graph and temperature readings.
Five control keys for instrument calibration and setup configuration.

Enclosure Box and Multi-Power Supply
Wall mounting ABS plastic material IP65 Full box protection (144x144x122 mm)
Panel mounting ABS IP65 Front panel only (96x96x42 mm) and Rear IP20 protection
Powered from the mains 230Vac, 115Vac o 24Vac 50/60Hz, with a power consumption of 3.6VA, through a linear power supply.

Current outputs and Measure insulation
4÷20 mA current outputs.
Galvanized electrical and advanced measure insulation allowing the devices to reject the electrical noise present in heavy-industrial applications.
One independent programmable Output measures with Proportional routine regulation.

Relay Outputs
Two independent relays, two set points, alarm remote and back washing probe setting by software.
On/Off, Timed and Proportional (PWM) routine function setting.

Solid State Relay (SSR)
One Frequency output signal, one set point.

Snail Lock fixing system
Quick connection for panel mounting version.

APPLICATIONS

- Waste water
- Diary
- CIP
- Fish farming
- Drinking water
- Cooling towers
- Boilers
- Reverse osmosis
- Galvanic process
- Irrigation

Your Choice,
Our Commitment

Technical data can be changed without notice.
Kontrol-65-Series_R4

PRODUCTS KEY

K	**Kontrol**						
	065	**Series**					
		PR	pH/ORP Probe				
		AP	Amperometric Chlorine Probe				
		FX	Flow Rate Probe				
		CD	Electrical Conducibility (Conductivity) Probe				
		MP	Modular Parameter: CL2 / PAA / BR / H2O2 / O3 / TURB / O2 and Custom unit				
			P	Box Type 96x96			
			W	Box Type 144x144			
				H	230Vac, 115Vac o 24Vac		
					0	**Optional none**	
						000	**Free**
K	**065**	**PR**	**P**	**H**	**0**	**000**	

MEASURE RANGE

Measure	Description	Accuracy
pH	0 ÷ 14 pH	± 0,10 pH
ORP	± 2.000 mV	± 5 mV
Conductivity	0,054 ÷ 200.000 µS	± 5 %
Flow Rate	0 ÷ 99.999 liters/Sec	± 0,5 Hz
Amp. Chlorine	0 ÷ 5 ppm	± 0,01 ppm
Pot. Chlorine	0 ÷ 200 ppm	± 0,01 ppm
PAA	0 ÷ 99.000 ppm	± 0,01 ppm
H2O2	0 ÷ 99.000 ppm	± 0,01 ppm
Ozone	0 ÷ 99.000 ppm	± 0,01 ppm
Bromine	0 ÷ 10 ppm	± 0,01 ppm
Temperature	0 ÷ 100°C (-32÷212 °F ±1,8°F)	± 1 °C

TECHNICAL SPECIFICATIONS FOR THE pH MEASURE

Measure Range	0.00 ÷ 14.00 pH
Resolution	± 0.01 pH
Accuracy	± 0.10 pH

TECHNICAL SPECIFICATIONS FOR THE ORP MEASURE

Measure Range	± 2.000 mV
Resolution	± 1 mV
Accuracy	± 5 mV

TECHNICAL SPECIFICATIONS FOR THE FLOWRATE MEASURE

Sensor	Hall, Reed or Push-Pull Sensor
Measure Range	0.5 Hz at 1500 Hz
Accuracy	± 0.5 Hz

TECHNICAL SPECIFICATIONS FOR THE mA MEASURE

Sensor	Current Sensor with 2 or 3 wires
Measure Range	0-20 mA or 4-20 mA
Resolution	± 10 µA
Accuracy	± 0.01 ppm

TECHNICAL SPECIFICATIONS FOR THE CONDUCTIVITY MEASURE

Probes	Range
Range with C 0.01 cm-1 / K 100 sensor	0.005 µS/cm to 200 µS/cm (5 KΩ x cm to 200 MΩ x cm)
Range with C 0.10 cm-1 / K 10 sensor	0.05 µS/cm to 2 mS/cm (500 Ω x cm to 20 MΩ x cm)
Range with C 0.20 cm-1 / K 5 sensor	0.1 µS/cm to 4 mS/cm (250 Ω x cm to 10 MΩ x cm)
Range with C 1.00 cm-1 / K 1 sensor	0.5 µS/cm to 20 mS/cm (50 Ω x cm to 2 MΩ x cm)
Range with C 10.0 cm-1 / K 0.1 sensor	5 µS/cm to 200 mS/cm (5 Ω x cm to 200 KΩ x cm)
Range with C 20.0 cm-1 / K 0.05 sensor	10 µS/cm to 400 mS/cm (2,5 Ω x cm to 100 KΩ x cm)
Resolution Cond/Res	0.0001 / 0.001 / 0.01 / 0.1 / 1 (adjustable from menu)
Accuracy Cond/Res	± 5% on the measuring point
Maximum distance of the sensor	up to 50 m (up to 164 ft)
TDS Range	0.3 to 2.0 ppm/µS


TECHNICAL SPECIFICATIONS FOR THE TEMPERATURE MEASURE

Sensor	PT100 / PT1000
Measure Range	0 ÷ 100 °C (+32 ÷ +212 °F)
Resolution	± 0.1 °C (°F)
Precision	± 1.0 °C (± 1.8°F)


OPERATING SPECIFICATIONS

Power Supply	230Vac, 115Vac o 24Vac 50/60Hz
Power Consumption	3.6 VA through a linear power supply
Relay Outputs:	Mechanical 250 VAC/5A, 30 VCC/3 A
Alarms:	
Function	Delay, Faults and Min./Max
Delay time	1÷3600 sec
Threshold disabling	Enable / Disable
Relay function	Closed / Open
SSR (Solid State Relay)	2-SPST 60 VAC, max 100 mA, Bidirectional, NPN, PNP Frequency Output: 0 to 400 pulse/min Pulse-On Duration: 100 msec
HOLD Digital Input:	
Input Voltage	12÷32 Vdc
Absorption	10mA max
Analog Outputs:	
Outputs	N.1 4-20 mA Programmable
Maximum Load	500 Ohm
NAMUR Alarm Output	3.6 mA or 22 mA
Hold Alarm Value	
TDS function (for CD model only):	
Outputs	ppm (parts per million) for cooling tower application Ohm (resistivity) for reverse osmosis application
Value range	0.3 to 2.0 ppm/µS

DIMENSIONS

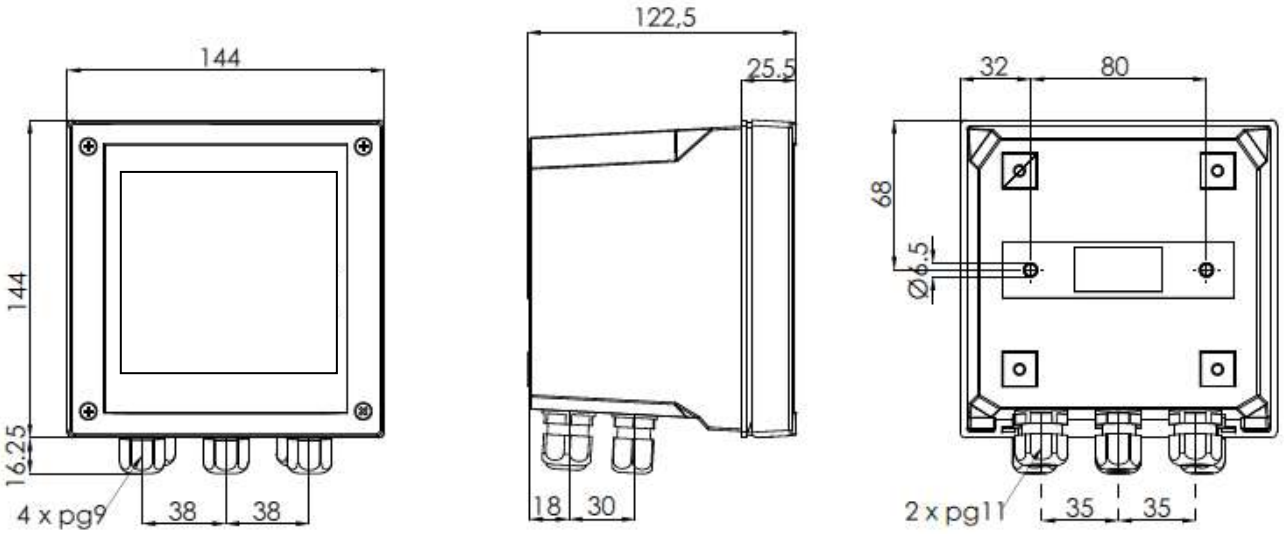

- Wall mounting size (144x144x122,5 mm) - Dimensions and footprint for wall mounted device.

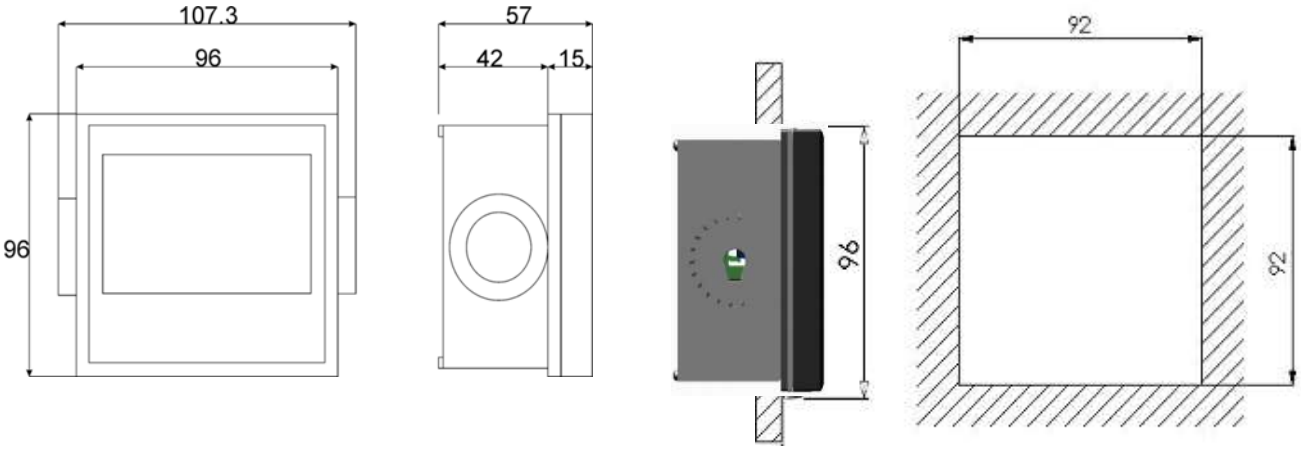

-Panel mounting size (96x96x42 mm) - Panel cutout and dimensions for Snail Lock System for panel mounted device.