
PRESSURIZED + PROBE HOLDER

PSS3- Pressurized Probe Holder

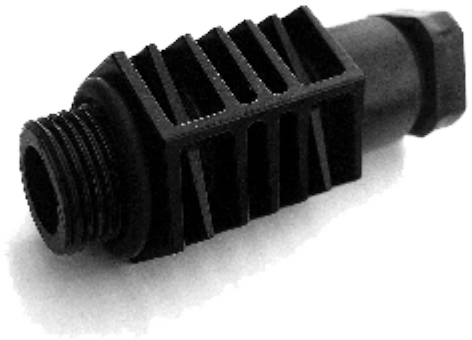


FEATURES:

- Pressurized probe holder
- Max slant 45° in the direction of the flow
- Vertical o slanted position
- Allows to immerse the probe directly into the pipe where the sample to be measured passes

FIELD APPLICATION:

- Swimming pool
- Wast Water
- Cooling Tower
- Irrigation Plant

DIMENSIONS

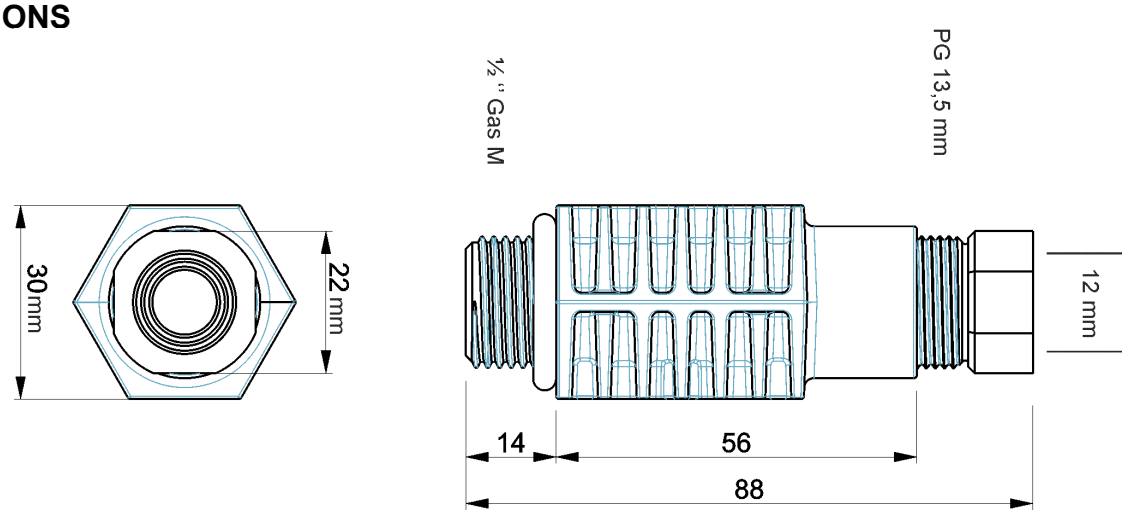

TECHNICAL CHARACTERISTICS

	Connection	Probes attachment	Max temperature	Max pressure	Body Material	Gasket
PSS 3	½" G.M.	PG 13.5 or Ø 12mm	60°C	12 bar	PVC	Viton V747-75